



Ejes integrados y contrapeso

1800 Kg (3968 Lb) de capacidad máxima

700 Kg (1543 Lb) de capacidad de 26m (85 pies)

26 metros (85 pies) de funcionamiento máximo radio de gancho


19,3 m (63 pies) de altura máxima del gancho con pluma horizontal

CAPACIDAD DE CARGA

CAPACIDAD DE CARGA							ch - PS	kW
	8 LVF 9 Optima	230V  1	m/min	↑ 3,5 ↓ 3,5	↑ 7 ↓ 16	↑ 18 ↓ 36	3.3	2.4
		20A	kg	1800	1800	700		
		230V  2	m/min	↑ 3,5 ↓ 3,5	↑ 11 ↓ 16	↑ 25 ↓ 36	5.2	3.8
		32A	kg	1800	1800	700		
		400V  3	m/min	↑ 3,5	↑ 16	↑ 36	7.5	5.5
			kg	1800	1800	700		
	1 DVF 4	–	m/min	14 → 36(0→700Kg) - 14→ 28(700 → 1800 Kg)			1.5	1.1
	RVF 22	–	tr/min U/min rpm	0 → 1			1.5	1.1

CEI 38 	IEC 38	kVA
230 V(+6% - 10%) 50Hz 		230V 20A : 4.6 kVA 230V 32A : 7.4 kVA
230 V(+6% - 10%) 50Hz		400 V : 11 kVA

8 LVF 9 Optima

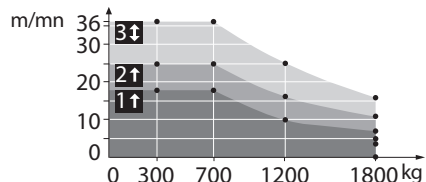


CONSTRUEQUIPOS

CRANEX

POTAIN IGO MA 21

Especificaciones Técnicas

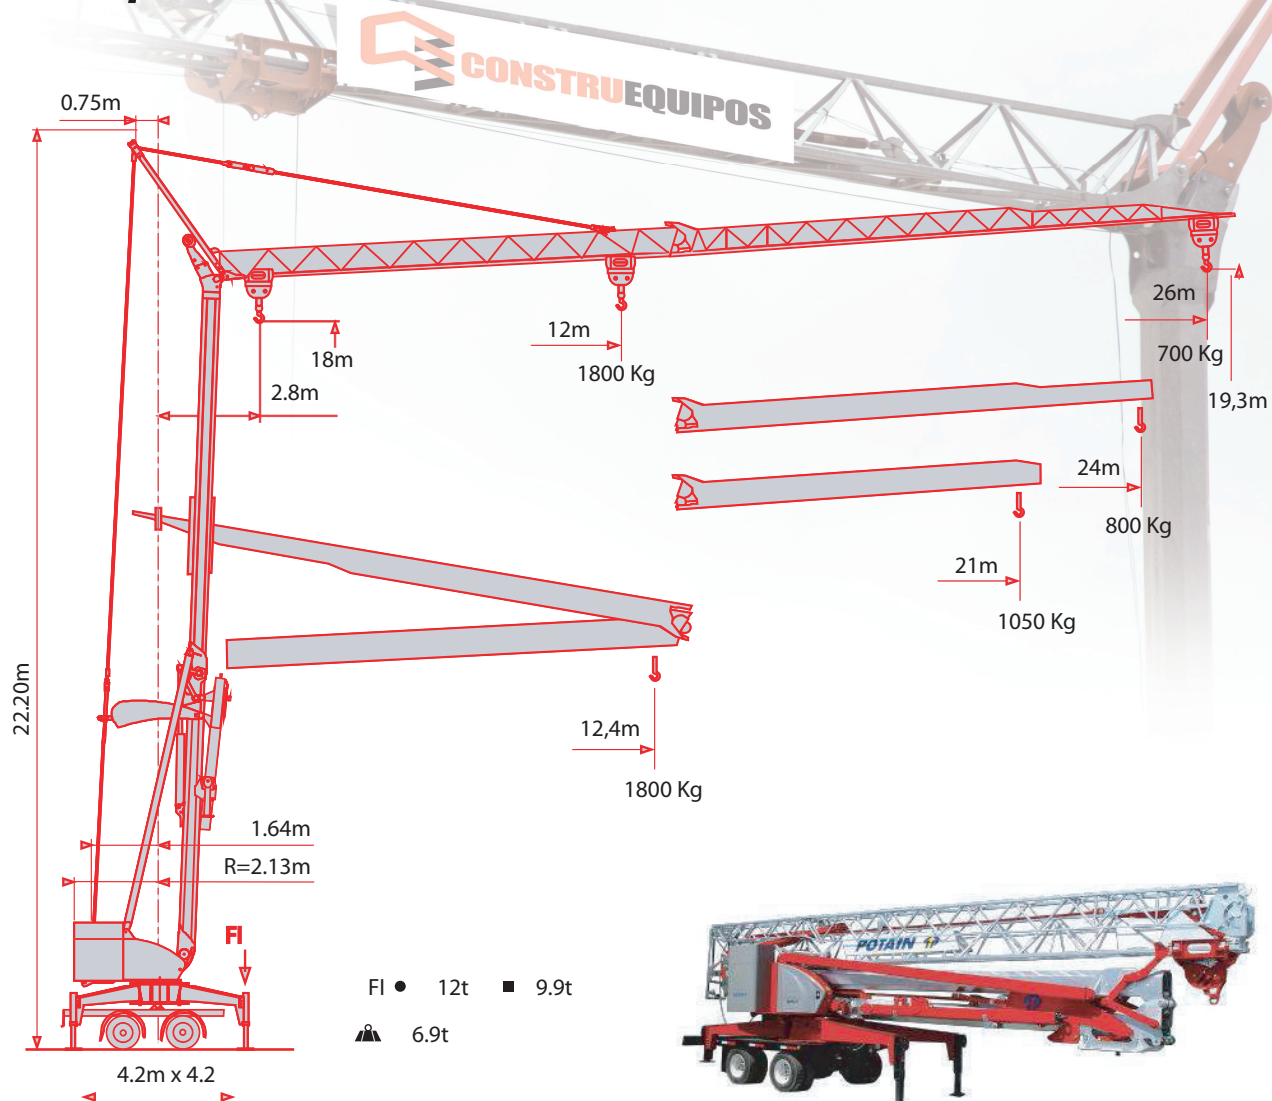

CAPACIDAD DE CARGA

26m	2.3m ▶	12.4 m	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	m
▲▲▲		1800 Kg	1800	1630	1490	1370	1265	1175	1095	1025	965	910	860	815	775	735	700	kg
24m	2.3m ▶	12.4 m	12,3	13	14	15	16	17	18	19	20	21	22	23	24		m	
▲▲▲		1800 Kg	1800	1685	1535	1415	1310	1215	1135	1060	1000	940	890	845	800		kg	
21m	2.3m ▶	12.4 m		13	14	15	16	17	18	19	20	21					m	
▲▲▲		1800 Kg		1800	1710	1570	1455	1350	1265	1185	1115	1050					kg	